

10/25/00

10-26-00

A

Express Mail Label No.: EL668460602US

**NEW UTILITY PATENT APPLICATION
TRANSMITTAL
(Large Entity)**

(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Docket No. S63.2-9503

Total Pages in this Submission

(including checks and postcard)

26

Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

JC841 U.S. PTO
09/696378
10/25/00

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled: **DIMENSIONALLY STABLE BALLOONS** and invented by: John Jianhua Chen, Lixiao Wang, Yiqun Wang and Albert C.C. Chin

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 09/426,384 filed October 25, 1999

Enclosed (in addition to the 4 pages of this transmittal) are:

4 pages

Application Elements

1. ☒ Filing fee as calculated below:

a. ☒ filing fee is NOT ENCLOSED - fee will be paid at the time of responding to the Notice of Missing Parts -- **DO NOT CHARGE DEPOSIT ACCOUNT**

b. ☐ a check in the amount of \$00 to cover the filing fee is enclosed.

___ pages

c. ☐ charge to Deposit Account as authorized at Item 2(a) on next page.

FEE CALCULATION AND CLAIMS

For	No. Filed	No. Allowed	No. Extra	Rate	Fee
Total Claims		- 20 =		x \$18.00	\$
Indep. Claims		- 3 =		x \$80.00	\$
BASIC FEE					\$710.00
TOTAL FILING FEE					\$

continued on next page.....

**NEW UTILITY PATENT APPLICATION
TRANSMITTAL
(Large Entity)**

(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Docket No. S63.2-9503

Total Pages in this Submission

(including checks and postcard)

26

10/25/00
09/696378
USPTO
JCS41

2. The Commissioner is hereby authorized to charge and credit Deposit Account No. 22-0350 as described below. A duplicate copy of this sheet is enclosed.

- a. ☐ Charge the amount of \$____ as filing fee.
- b. ☐ Credit any overpayment.
- c. ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- d. ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

3. ☒ Specification having 12 pages and including the following:

12 pages

- a. ☒ Application Cover Sheet - 1 page
- b. ☒ Descriptive Title of the Invention -
- c. ☒ Cross References to Related Applications *(if applicable)*
- d. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
- e. ☐ Reference to Microfiche Appendix *(if applicable)*
- f. ☒ Background of the Invention
- g. ☒ Brief Summary of the Invention
- h. ☒ Brief Description of the Drawings *(if applicable)*
- I. ☒ Detailed Description
- j. ☒ Claim(s) as Classified Below - 2 pages
- k. ☒ Abstract of the Disclosure - 1 page

4. ☒ Drawing(s) *(when necessary as prescribed by 35 U.S.C. 113)* 3 sheets

3 pages

5. ☒ Oath or Declaration -

3 pages

- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 C.F.R. 1.63(d)) *(for continuation/divisional application only)*

6. ☐ Separate Power of Attorney

____ pages

- ☐ 37 C.F.R. 3.73(B) Statement *(when there is an assignee and power of attorney is from assignee)*. It is hereby certified that the undersigned has authority to make this certification and has reviewed all the documents in the chain of title of the patent application identified herein and, to the best of undersigned's knowledge and belief, title is in the assignee identified in the accompanying Power of Attorney.

NEW UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity) <i>(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))</i>	Docket No. S63.2-9503
	Total Pages in this Submission <i>(including checks and postcard)</i> 26

☐ Power of Attorney filed in parent application.

7. ☐ Incorporation by Reference *(usable if Box 5b is checked)*

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 5b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

8. ☐ Computer Program in Microfiche *(Appendix)*

___ pages

9. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all must be included)

___ pages

a. ☐ Paper Copy

b. ☐ Computer Readable Copy *(identical to computer copy)*

c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

10. ☐ Assignment Papers:

___ pages

a. ☐ Assignment Recordation Cover Sheet (Form PTO 1595)

b. ☐ Assignment

c. ☐ A check in the amount of \$___ to cover the Recordal Fee

d. ☐ Previously recorded on ***, Reel **, Frames **

11. ☐ English Translation Document *(if applicable)*

___ pages

12. ☐ Information Disclosure Statement:

___ pages

a. ☐ PTO Form 1449 b. ☐ Copies of IDS Citations

13. ☐ Preliminary Amendment

___ pages

14. ☒ Acknowledgment Postcard

1 page

15. ☒ Form of Mailing - Express Mail *(Specify Label No.):* EL668460602US

16. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

___ pages

Express Mail Label No.: EL668460602US

NEW UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity) <i>(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))</i>	Docket No. S63.2-9503
	Total Pages in this Submission <i>(including checks and postcard)</i> 26


17. ☒ Additional Enclosures *(please identify below)*: 3 pages
- ☒ Constructive Petition for Extension of Time and Fee Authorization Pursuant to 37 C.F.R. §1.136(a)(3) - 1 page
 - ☒ Correspondence Address form - 1 page
 - ☒ Limited Authorization to Act on Behalf of Assignee Regarding Certain Patent Matters
Effective Through: December 31, 2000 - 1 page

Respectfully submitted,

VIDAS, ARRETT & STEINKRAUS

Date: October 25, 2000

By:



Walter J. Steinkraus
Registration No. 29,592

6109 Blue Circle Drive, Suite 2000
Minnetonka, MN 55343-9185
Telephone: (952) 563-3000
Facsimile: (952) 563-3001
F:\WPWORK\WJS\9503-TRA.A25

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PATENT

Inventor(s):	Chen et al
Title:	DIMENSIONALLY STABLE BALLOONS
Filed:	<input checked="" type="checkbox"/> concurrently herewith
	<input type="checkbox"/> on _____ and assigned Serial No. _____



Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

Docket No.: S63.2-9503

**CONSTRUCTIVE PETITION FOR EXTENSION OF TIME AND FEE
AUTHORIZATION PURSUANT TO 37 C.F.R. §1.136(a)(3)**


Applicant hereby requests that the United States Patent and Trademark Office treat any concurrent or future reply requiring a petition for an extension of time pursuant to §1.136 for its timely submission as incorporating therein a petition for an extension of time for the appropriate length of time.

Applicant authorizes the Commissioner of Patents and Trademarks to charge all required extension of time fees that have not otherwise been paid to Deposit Account No. 22-0350.

Respectfully submitted,
VIDAS, ARRETT & STEINKRAUS

Date: October 25, 2000

By:


Walter J. Steinkraus
Registration No. 29,592

6109 Blue Circle Drive, Suite 2000
Minnetonka, MN 55343-9185
Telephone: (952) 563-3000
Facsimile: (952) 563-3001

DOCKET NO.: S63.2-9503

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR UNITED STATES LETTERS PATENT**

INVENTORS: John Jianhua Chen, Lixiao Wang, Yiqun Wang, Albert C.C. Chin

TITLE: DIMENSIONALLY STABLE BALLOONS

ATTORNEYS: Lisa L. Ryan-Linquist
VIDAS, ARRETT & STEINKRAUS
Suite 2000
6019 Blue Circle Drive
Minnetonka, Minnesota 55343-9131
Phone (612) 563-3000
Fax (612) 563-3000

DIMENSIONALLY STABLE BALLOONS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of copending US Patent

5 Application Serial No. 09/426384.

BACKGROUND OF THE INVENTION

Medical catheters having a balloon mounted thereon are useful in a variety of medical procedures. A balloon may be used to widen a vessel into which the catheter
10 is inserted by dilating the blocked vessel, such as in an angioplasty procedure. More significant to the present invention however, is the use of a catheter to deliver a medical device, such as a stent, into a body lumen. Some examples of stent delivery balloons are disclosed in U.S. Patent No. 5702418, and U.S. Patent No. 5797877, the entire contents of both patents is hereby incorporated by reference. In these and other medical device
15 delivery applications, radial expansion of a balloon may be used to expand or inflate a stent at a desired position within the body. Using a balloon equipped catheter to deliver a stent requires precise positioning of the balloon and stent as well as a balloon with accurate and predictable expansion properties. A known drawback of many previous delivery catheters and balloons is that when a balloon is radially inflated to a
20 desired extent, the balloon will also expand longitudinally. As a result of longitudinal expansion of a balloon during the delivery of a medical device, the balloon itself, the medical device mounted thereupon or both apparatuses may be shifted from their pre-inflation position resulting in improper delivery of the medical device.

In balloons where longitudinal expansion occurs, the balloon may expand
25 longitudinally past one or both of the stent ends. Typical stent delivery balloons will expand longitudinally at least 5% beyond the original pre-inflation state. In addition to potentially mis-delivering the medical device as described above, the resulting extended balloon may cause the edges of the stent to push against the vessel wall to a greater extent than they would from radial expansion alone. The protruding stent edges may
30 damage or tear the surrounding vessel resulting in potentially serious trauma for the patient.

It has recently been discovered that Liquid Crystal Polymers (LCP) may be effectively blended with other materials and extruded to form high strength medical balloons. In copending U.S. applications 08/926,905 (corresponding to PCT/US98/18345 filed Sept. 4, 1998), and 09/257,677 filed February 25, 1999 there are 5 described medical balloons made from LCP blends. The entire contents of both of these applications is hereby incorporated by reference.

U.S. Patent No. 5,389,314 to Wang discloses an inflatable medical device which has a plurality of longitudinally oriented conduits which extend through out the length of the device. The device may be formed by co-extruding two dissimilar plastic 10 materials. The first material form defining a discrete phase which forms fibers and the other material or continuous phase which forms the remaining balloon material. After extrusion the discrete phase is withdrawn from the continuous phase, leaving the continuous phase with a plurality of conduits therethrough.

15 BRIEF SUMMARY OF THE INVENTION

The present invention is directed generally to medical balloons which expand only to a predetermined extent, and which have minimal longitudinal and/or minimal radial growth during expansion. Specifically, the invention is directed to a stent delivery balloon composed of a micro-composite material which includes a longitudinal 20 fibril structure that is either parallel to the longitudinal axis of the balloon structure, or that is diagonal to the longitudinal axis at the molecular level of the balloon. The orientation of the fibril structure can limit longitudinal expansion of the balloon and allow the balloon to expand radially as desired, but minimally, or not at all in the longitudinal direction if the fibrils are parallel to the balloon axis, or when the fibrils are 25 oriented diagonally about the axis, can limit both longitudinal and radial expansion of the balloon when inflated.

The micro-composite material is made up of a combination of a fibril component, a semi-compliant balloon material which acts as a matrix, and optionally a compatibilizer material which may act to create a less distinctive phase boundary 30 between the fibril and matrix components, but which does not solubilize the LCP polymer in the matrix at human body temperature.

The present invention provides for a balloon which utilizes LCP materials or other oriented materials such as PET, in combination with a thermoplastic elastomer matrix and an optional compatibilizer to form a micro-composite material. The present micro-composite material is suitable for construction balloons which exhibit minimal or
5 no longitudinal growth during balloon expansion but which expands as desired in the radial direction, or the present micro-composite material is suitable for construction of balloons that exhibit minimal expansion both in the longitudinal and radial directions.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

10 A detailed description of the invention is hereinafter described with specific reference being made to the drawings in which:

FIG. 1 is a schematic representation of side view of a tubular parison used to produce a balloon of the invention from a the micro-fiber composite material;

FIG. 2 is a schematic side view of a medical device delivery balloon
15 constructed from micro-composite material shown at nominal diameter wherein the fibril component is oriented parallel to the longitudinal balloon axis.

FIG. 3 is a view of the medical device delivery balloon shown in Fig. 2 in an inflated state at a pressure higher which causes radial growth of the balloon;

FIG. 4 is a cross-sectional view of a tubular parison for producing balloon
20 of an alternative embodiment of the invention; and

FIG. 5 is a perspective view of the embodiment shown in FIG. 4.

FIG. 6 is perspective view of a dilatation balloon preform in a tubular parison form constructed from micro-composite material wherein the inner and outer fibril components have been oriented diagonally to the longitudinal axis of the tubular
25 preform and in crossing relationship relative to each other by use of a counter-rotating extrusion die.

FIG. 7 is another perspective view of only the outer surface of a dilatation balloon preform constructed from micro-composite material wherein the fibril component is oriented diagonally to the longitudinal axis of the tubular preform by use of
30 a rotating die.

FIG. 8 is a schematic side-view of a blow molded dilatation balloon

constructed from micro-composite material depicting the fibril component oriented diagonally to the longitudinal axis of the balloon.

DETAILED DESCRIPTION OF THE INVENTION

5 While this invention may be embodied in many different forms, there are shown in the drawings and described in detail herein specific preferred embodiments of the invention. The present disclosure is an exemplification of the principles of the invention and is not intended to limit the invention to the particular embodiments illustrated.

10 As noted above, the present invention relates to medical catheters which have one or more balloon portions constructed from a specially configured micro-composite material. The particular micro-composite material and configuration provides physical properties which allow a balloon to expand radially to a predetermined extent, but which allow only minimal, or more preferably, no longitudinal growth during
15 expansion. The micro-composite material includes a longitudinal fibril component which exhibits micro-fibers at the molecular level in combination with a matrix of any semi-compliant balloon material. Depending on the specific fibril component, as well as the method of extrusion utilized to extrude the balloon material, the micro-fibers may be randomly scattered through out the balloon material or may be precisely spaced about the
20 balloon and extending through the entire balloon length. The fibril structure is oriented or directed in the longitudinal direction of the balloon providing the balloon with desirable radial expansion characteristics and minimal longitudinal growth when the balloon is inflated.

As shown in Fig. 1, the balloons of the invention may be made from
25 tubular parisons 10 of the micro-composite material, having a fibril component which exhibits micro-fibers 12 uniformly oriented in a predetermined direction. In a preferred embodiment shown in Fig. 2, the micro-composite is formed into a balloon 20 from a parison 10 by a conventional balloon blowing process. Balloon 20 has a diameter D and a length L. Micro-fibers 12 are oriented along and about the longitudinal axis 22 of the
30 balloon at the molecular level. The fibril component may be any rigid-rod or semi-rigid-rod thermoplastic material which comprises 0.1 to about 20 percent, and more preferably

from about 0.5 to about 15 percent by weight of the micro-composite material.

Examples of suitable materials which could be utilized as the fibril component include: liquid crystal polymers such as VECTRA® LKX 1107, 1111, polyetheretherketone (PEEK) material, and PPS. Other materials may also be utilized as the fibril component of the present invention. Such substances include aromatic nylon, rigid polyurethane, polyester, copolyester, polyester blends, polyester/polyurethane blends, PEEK, PPS, fluoropolymer and so on.

To form the micro-composite material, the fibril component is preferably combined with a semi-compliant thermoplastic polymer material in a melt blend which at least partially phase separates upon cooling. Under appropriate conditions the phase separated material will form fibrils or micro-fiber embedded in a matrix of the semi-compliant thermoplastic polymer, oriented substantially parallel to the longitudinal axis of the extruded tubing. The micro-composite material suitably employs an amount of semi-compliant polymer matrix component from about 50 to 99.9 percent by weight, preferably from about 85 to 99.5 percent.

Some examples of suitable materials which may be utilized as the matrix component are polyamide-polyester block copolymers, namely the polyamide/polyether/polyesters PEBAX® 6333, 7033 and 7233; also polyester-polyether block copolymer such as ARNITEL® 540.

As previously described, the present invention achieves the desired balloon expansion characteristics as a result of forming a balloon composed of a micro-composite material. The micro-composite material balloon is formed by coextrusion of a melt blend of LCP or other orientable material, the matrix component, and optionally a compatibilizer. A dual extrusion process utilizing two extruders may also be used to form the desired tube. In the case where LCP is used as the fibril component, the longitudinally oriented fibers are formed by subjecting the blend material to a relatively high extrudate puller speed. The high speed of the puller will subject the blend material to a shearing force which causes a material such as LCP to elongate and form fibers. If the LCP is not subjected to a high shearing force, the LCP will form droplet shaped deposits which provide minimal or no longitudinal stabilization.

If, during extrusion, relative rotation of the mandrel and die is avoided,

the fibrils will adopt an orientation substantially parallel to the longitudinal axis. If the die and mandrel are relatively rotated, e/g. by rotation of one or the other or both, the orientation of the fibrils will be helically about the axis.

A balloon which has an LCP fibril component tends to have individual
5 fibers spread randomly throughout the balloon material. The individual LCP fibers will typically be between 0.1 micron to 1 micron in diameter.

If the various components utilized to form the micro-composite material are incompatible to a substantial degree, phase separation may be so efficient that slippage between phases might occur during balloon expansion thereby reducing the
10 longitudinal restriction effect of the fibrils. To prevent such occurrences a compatibilizer may also be desirable for the purpose of enhancing the homogeneity of the melt blend prior to extrusion and cooling. A compatibilizer material may be added to the pre-extruded melt blend material to create a less distinctive phase boundary between the fibril and matrix components. The compatibilizer may be for instance a block copolymer
15 comprising a block which is structurally similar or otherwise is soluble in the matrix polymer and a block which is structurally similar or otherwise soluble with the fibril component. An example of a suitable is the melt compatibilizer disclosed in application 08/926,905. Such a compatibilizer may be employed in an amount from 0 to about 30 weight percent.

20 The balloon 20, shown in Fig. 2 at nominal diameter, is shown in Fig. 3 inflated at a higher pressure which provides radial expansion to a new, larger diameter D' . In the most preferred embodiment, the micro-composite material 10 allows balloon 20 to obtain semi-compliant expansion in the radial direction while negating balloon expansion in the longitudinal direction during inflation (balloon length L is substantially
25 unchanged in Fig. 3). Depending on the precise mixture and type of matrix and fibril components used, other embodiments of the present invention may provide for balloons with varying degrees and types of radial expansion while also reducing longitudinal expansion by varying degrees.

If substances less prone to phase separation from the matrix material are
30 desired to be used, an appropriately shaped die may be used in the extrusion process to provide individually extruded fibers evenly around the tube circumference, for instance

in the manner of US 5,389,314 except that the fiber material is selected to adhere to the matrix material and a high line speed is used to provide a microscopic fiber diameter.

For such an embodiment, the individual non-LCP fibers will typically be between 10 - 12 microns in diameter and may also extend through the entire length of the balloon in chain

5 or cores.

This embodiment is depicted by the tubular parisons in Figs. 4 and 5. As shown, cores 30 are suspended through out the parison 31 in a matrix 32 which may be composed of any material suitable for constructing a semi-compliant balloon as have been described above. The cores 30 are composed of a material which has a more
10 limited ability to stretch than the matrix material, and when the cores are collectively oriented in the same direction, the structures exhibit an increased longitudinal stability when inflated beyond initial or nominal diameter.

In selecting appropriate materials for the fibrils of cores 30 and matrix 32 it is important to select materials which provide adequate adhesion to one another. If

15 adhesion is insufficient between the cores 30 and the surrounding matrix 32 longitudinal growth of the balloon produced from parison 31 will not be restricted as the more expansive matrix material will slip past the individual cores. A further important attribute of the cores 30 is the bulk elongation of the material when oriented as described above. The bulk elongation of the cores 30 should be within the range of 50%-150%. In
20 order to avoid core breakage prior to balloon bursting, it is desirable to the present invention that if the material from which the cores are constructed exhibit a higher tensile strength than the material of which the matrix is constructed.

Figures 6-8 pertain to alternative embodiments in which the fibers of the balloon are orientated diagonally relative to the longitudinal axis of the balloon. In

25 Figure 6 there is depicted a parison 60 for a balloon in which, in addition to using a high puller speed during extrusion, a counter rotating die was used. The counter rotating die has a mandrel which rotates in one direction and a concentric outer die which rotates in the opposite direction, the parison is extruded through the space between the two. The resulting parison has fibers 62 orientated diagonally to the parison axis 64 in one
30 direction at the outside surface (angle α) and changing gradually as one passes through the material in a direction transverse to the axis 64 to a second direction (angle β) at the

inside surface, the angles determined by outer die/mandrel rotation speeds and puller speed. If one or the other of the outer die or the mandrel are held stationary while the other is rotated, angle α or angle β may be parallel to the axis 64.

In Figure 7 there is depicted a parison 70, having diagonally oriented
5 fibers formed by relative rotation of the die and puller. For instance only the outer die or mandrel may be rotated so that the fibers become orientated at angle α throughout the entire thickness of the parison.

Figure 8 depicts the outer surface orientation of a balloon 80 made from a parison of either Fig. 6 or Fig 7. In the balloon body the fibers retain an angular
10 orientation relative to the balloon axis and provide resistance to both longitudinal and radial expansion beyond the nominal or molded dimensions.

Based on the above description it should be understood that several different polymers with a wide range of characteristics may be used to form a longitudinal or longitudinal and radial stabilized balloon of the present invention. The following is an
15 example of a balloon and its manufacturing parameters which was actually constructed in accordance with the present invention disclosure.

Example 1: a matrix component of Pebax 7033 was mixed with a fibril component of LCP VECTRA LKX 1107 at the ratio of 95% to 5% respectively by weight. The mixture was extruded at a rate of 110 feet/minute line speed into tubing of
20 0.039 (outer diameter) x 0.027 (inner diameter) inch. A 3.5 mm balloon was formed from the resulting tubing by radial expansion at 110 degrees Celsius with blowing pressure of 350 psi. The balloon with double wall thickness of 0.0014 inch was inflated from 4 atm to 13 atm at 1 atm increment and no measurable balloon length change was observed.

25 This completes the description of the preferred and alternate embodiments of the invention. Those skilled in the art may recognize other equivalents to the specific embodiment described herein which equivalents are intended to be encompassed by the claims attached hereto.

What is claimed is:

1. A dimensionally stable polymer balloon having a longitudinal axis and composed of a micro-composite material, the micro-composite material comprising a polymer
5 matrix component and a polymer fibril component distributed in the polymer matrix component, the fibril component having micro-fibers oriented substantially parallel or diagonally to the longitudinal axis of the balloon.
2. The dimensionally stable balloon of claim 1 mounted on a catheter.
3. The dimensionally stable balloon of claim 1, wherein said fibril component
10 comprises about 20% by weight or less but greater than about 0.1% of said micro-composite material.
4. The dimensionally stable balloon of claim 1, wherein the micro-composite material further comprises a compatibilizer component.
5. The dimensionally stable balloon of claim 4 wherein said compatibilizer is a
15 block copolymer
6. The dimensionally stable balloon of claim 1, wherein the fibril component is composed of rigid-rod thermoplastic material.
7. The dimensionally stable balloon of claim 1, wherein the fibril component is composed of semi-rigid-rod thermoplastic material.
- 20 8. The dimensionally stable balloon of claim 1, wherein the fibril component is composed of liquid crystal polymer material.
9. The dimensionally stable balloon of claim 1, wherein the matrix component is a semi-compliant thermoplastic polymer.
10. The dimensionally stable balloon of claim 1, wherein the micro-fibers are
25 oriented substantially parallel to the longitudinal axis of the balloon.
11. The dimensionally stable balloon of claim 1, wherein the micro-fibers are oriented diagonally to the longitudinal axis of the balloon.
12. The dimensionally stable balloon of claim 1, wherein the orientation of the micro-fibers relative to the longitudinal axis of the balloon changes through the balloon material
30 in a direction transverse to said longitudinal axis.
13. A method of forming a balloon composed of a micro-composite material

comprising the steps of:

(a) melt blending a matrix component and a fibril component, wherein the mixture comprises less than about 15 percent by weight but greater than about 0.5 percent by weight of said fibril component, and the matrix component comprises less than about 99.5 percent by weight but greater than about 85 percent by weight of said matrix component;

(b) forming the melt blended mixture into tubing by extrusion in a manner which orients the fibril component along the longitudinal axis of the tubing; and

(c) forming the balloon by radial expansion of a segment of the tubing.

10 14. The method of claim 13 further comprising adding a compatibilizer to the melt blended mixture.

15. An inflatable medical balloon having a determined pre-inflation length, restricted longitudinal or radial expansion characteristics, a circumference and a longitudinal axis comprising:

15 a matrix material, said matrix material characterized as being semi-compliant; and having a plurality of cores therethrough, said cores being evenly distributed about the circumference of the balloon and being composed of one or more materials which are characterized as being stronger than the matrix material and having a bulk elongation less than the matrix material when the one or more materials are oriented in
20 the direction of the longitudinal axis, and the matrix material and the core material operatively adhering to one another.

16. The medical balloon of claim 15 wherein the bulk elongation of the one or more cores material is between 50% and 150%.

25

30

DIMENSIONALLY STABLE BALLOONS

5

ABSTRACT OF THE DISCLOSURE

A medical balloon composed of a micro-composite material which provides for radial expansion of a balloon to a predetermined extent, but which has minimal longitudinal growth during balloon inflation. The micro-composite material includes a fibril component, a matrix component, and optionally, a compatibilizer. The
10 fibril component may preferably be liquid crystal polymer fibers randomly scattered through out the balloon material. The liquid crystal polymers are created by extrusion at high speed. An alternative fibril component may be a PET fibers which are uniformly spaced about the balloon material and extend through out the length of the balloon material tube.

15

Attorney Docket # S63.2-9503

20

Fig. 1

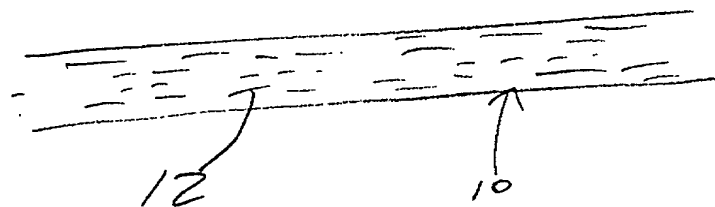


Fig. 2

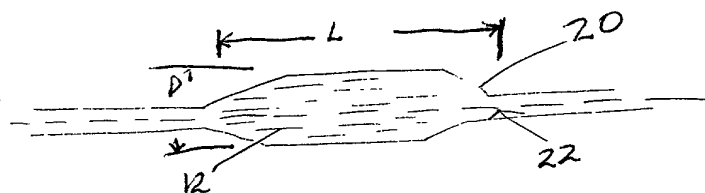


Fig. 3

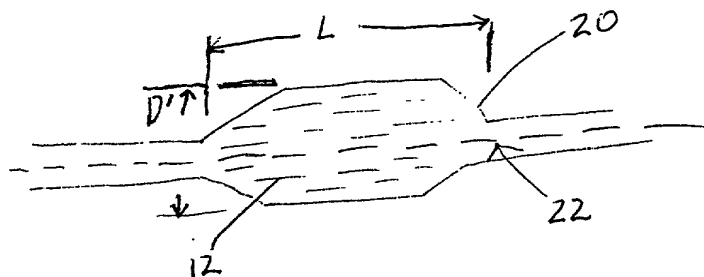


Fig 4

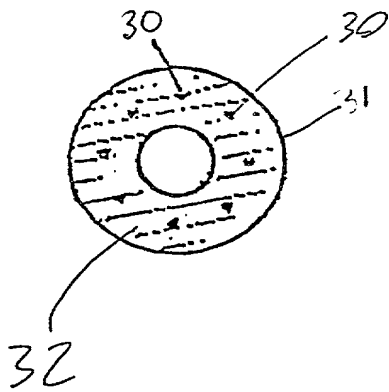


Fig 5

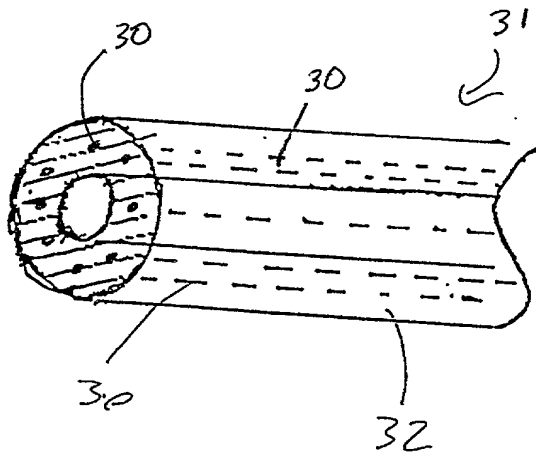


Fig. 6

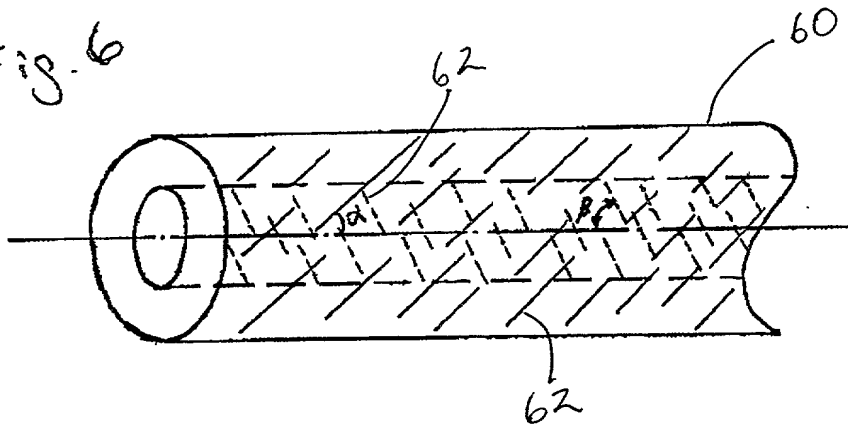


Fig. 7


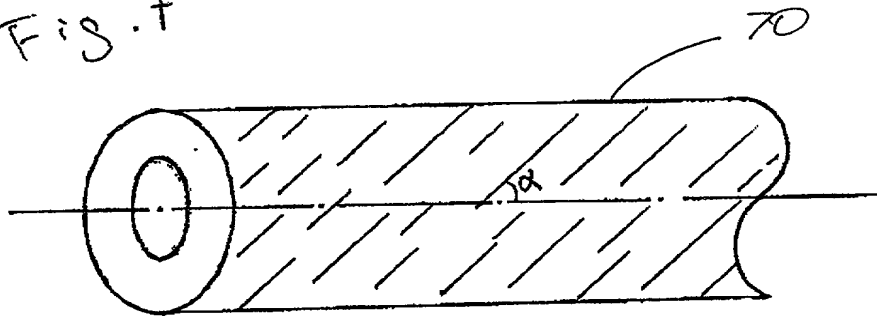


Fig. 8

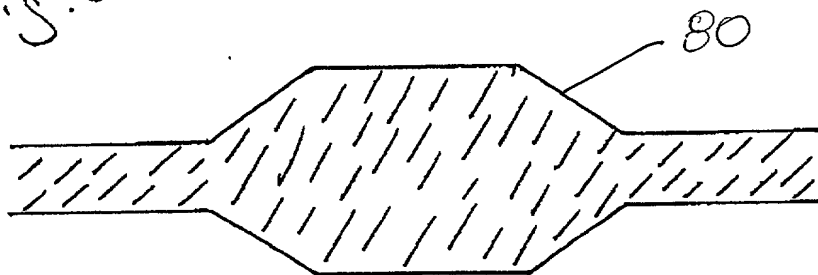

DECLARATION

As a below-named inventor, I(we) hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type:

- ☐ original
- ☐ design
- ☐ supplemental
- ☐ national stage of PCT
- ☐ divisional
- ☐ continuation
- ☒ continuation-in-part (CIP)

INVENTORSHIP DECLARATION

My residence, post office address, and citizenship are as stated below next to my name;

I verily believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DIMENSIONALLY STABLE BALLOONS

the specification of which:

- a) ☒ is being filed concurrently herewith
- b) ☐ was filed on _____ and assigned Serial No. _____
- c) ☐ was filed as PCT International Application No. _____ filed on _____ and amended under PCT Article 19 on _____.

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56 including information occurring between the filing date of any prior application of which the present application is a continuation-in-part.

- ☐ In compliance with this duty there is attached an Information Disclosure Statement.
37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d), of any foreign application(s) for patent or inventor's certificate or of any PCT international applications(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international applications(s) designating at least one country other than the United States of America filed by me having the same subject matter having a filing date before that of the application on which priority is claimed.

- a) ☒ no such applications have been filed.
b) ☐ such applications have been filed as follows:

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35 United States Code, §119(e) of any United States provisional application identified below.

- a) ☒ no such applications have been filed.
b) ☐ such applications have been filed as follows:

U.S. APPLICATIONS	
SERIAL NUMBER	U.S. FILING DATE
1.	
2.	

CLAIM FOR BENEFIT OF EARLIER U.S./PCT APPLICATIONS(S) UNDER 35 U.S.C. §120

I hereby claim the benefit under Title 35, United States Code, §120 of any United States applications(s) or PCT international applications(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior applications(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior applications(s) and the national or PCT international filing date of this application.

- a) ☐ no such applications have been filed.
b) ☒ such applications have been filed as follows:

U.S. APPLICATIONS	
SERIAL NUMBER	U.S. FILING DATE
1. 09/426384	10/25/1999
2.	
PCT APPLICATIONS DESIGNATING THE U.S.	
PCT APPLICATION NO.	PCT FILING DATE
3.	

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Telephone calls and correspondence should be directed to: Walter J. Steinkraus, at
Customer No. 490, Telephone: (952) 563-3000, Facsimile: (952) 563-3001.

SCANNED, # _____

First Inventor

Full name **John Jianhua Chen**

Inventor's signature _____

Date _____

Citizenship **United States of America**

Post office Address **4725 Terraceview Lane
Plymouth, MN 55446**

Residence
(If different than above)

Third Inventor

Full name **Yiqun Wang**

Inventor's signature _____

Date _____

Citizenship **Peoples Republic of China**

Post office Address **6669 Quantico Lane N.
Maple Grove, MN 55311**

Residence
(If different than above)

Second Inventor

Full name **Lixiao Wang**

Inventor's signature _____

Date _____

Citizenship **United States of America**

Post office Address **12822 - 86th Place North
Maple Grove, MN 55369**

Residence
(If different than above)

Fourth Inventor

Full name **Albert C.C. Chin**

Inventor's signature _____

Date _____

Citizenship **United States of America**

Post office Address **25 Bernard Street
Newton, MA 02461**

Residence
(If different than above)